## Lithium Iron Phosphate (LiFePO4) Battery

## SBE-12.8V24Ah


### **Features**

- ◆ Using the technology of lithium iron phosphate cell, superior safety, thousands of cycles, 100%DOD, under normal conditions.
- ◆ Built-in automatic protection for over-charge, over discharge, over current and over temperature.
- ◆ Free of maintenance .
- ◆ Internal cell balancing.
- ◆ Lighter weight: About 40% ~50% of the weight of a comparable lead acid battery.
- ◆ Replacement for lead-acid battery.
- ◆ Wider temperature range:-20°C~60°C.
- ◆ Support for Series application expansion (up to 51.2V) or two in parallel.

### Application

- **♦** UPS
- Solar &Wind Power System
- ◆ Golf Cart
- ◆Electric Vehicle, E-bike, E-rickshaw etc.
- **♦** Lighting



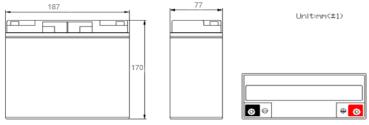


#### **General Specications** Nominal Voltage 12.8V **Nominal Capacity** 24Ah@0.2C 307Wh Energy Electrical Internal Resistance ≤100mΩ Characteristics Cycle Life 3000 Cycles @ 4.8A Charging/Discharging, Until 70% Capacity Self Discharge ≤3.5% per month at 25°C Max.Charging Voltage 14.0~14.4V At 0°C~45°C temperature, charged to 14.4V at a constant current of 5A, and **Charging Mode** then, changed continuously with constant voltage of 14.4V until the current was not Standard Charging more than 0.5A 5A **Charging Current** Max.Charging Current 12A 12A **Discharging Current** Max. Continuous Current 24A Standard Discharging Discharging Cut-off Voltage 10.0V Charge Temperature $0^{\circ}$ to $45^{\circ}$ (32°F to 113°F) @60±25% Relative Humidity Discharge Temperature -20°C to 60°C(-4°F to 140°F) @60±25% Relative Humidity **Operating Condition** $0^{\circ}$ C to $45^{\circ}$ C( $32^{\circ}$ F to $113^{\circ}$ F) @60±25% Relative Humidity Storage Temperature Water Dust Resistance IP55 32700/4S4P Cell & Format Casing Plastic 【Voltage display】 187\*77\*170mm Dimension(L\*W\*H\*TH) Structure 2.9Kg Weight Approx. **Terminal** M5

ShenZhen FBTech Electronics Ltd.


# Lithium Iron Phosphate (LiFePO4) Battery

## SBE-12.8V24Ah




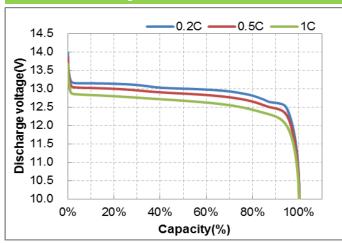


### Charge Characteristics of capacity-voltage@0.2C&0.5C, 25℃

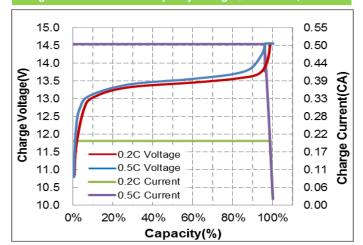


Different Temperature Discharge Curve @0.5C

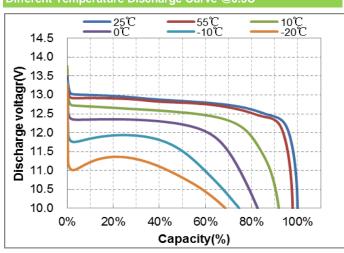

Charge Characteristics of time-voltage@ 25℃

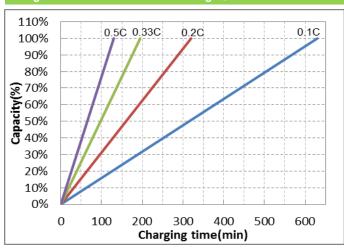

Different DOD Discharge Cycle Life Curve @0.2C,25℃

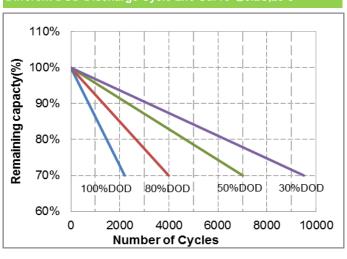

Open circuit voltage VS SOC%@25℃

