
RC12-55G (12V, 55Ah)



Plane Chart:

Unit:(mm) Terminal type:(D3)

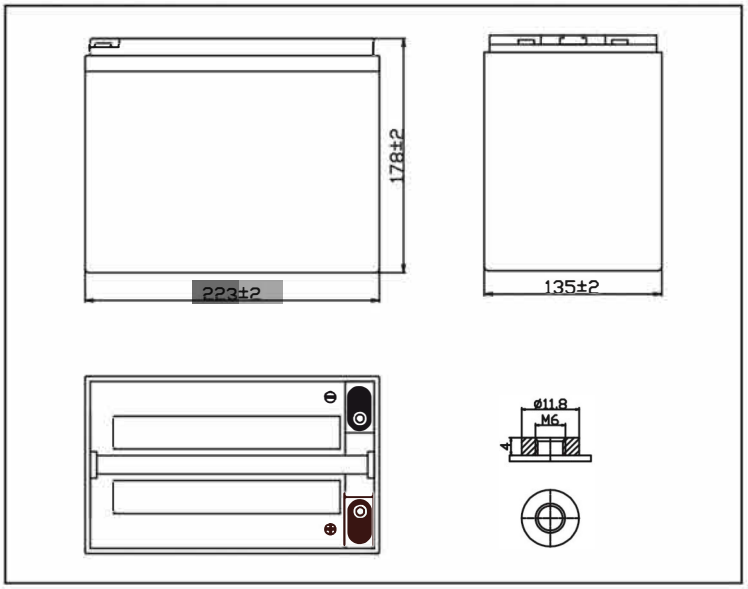


Parameter Chart:

Volts	12V	
Capacity(25°C)	3 hours rate (18.3A)	55Ah
	10 hours rate (6A)	60Ah
Capacity Affected By Temperature	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	70%
Residual Capacity (25°C)	Capacity After 3 Months Storage	90%
	Capacity After 6 Months Storage	80%
	Capacity After 12 Months Storage	60%
Design cycle service life	4 years	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 16.5A Voltage 14.5~14.9V
	Float (25°C)	Charge Voltage 13.6~13.8V
Weight (Approx)	15.0Kg	

★The above are average and data obtained from the firsr 3 charge/discharge cycles. These are not minimum values.

Performance curve

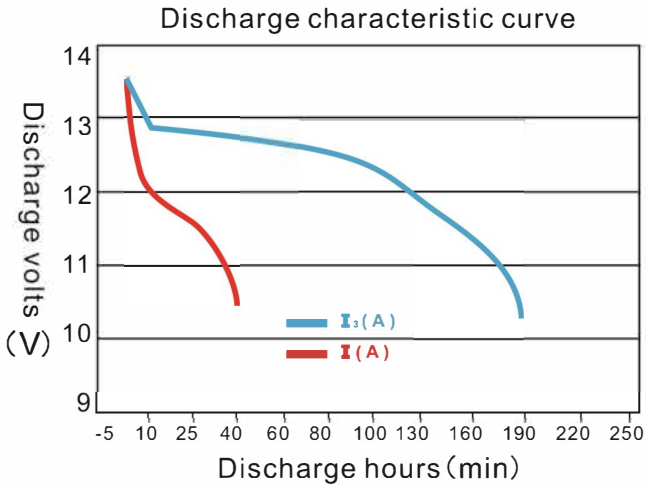

Cycle service life in relation to the depth of discharge

