

[<-- back](#)

MODEL TL-5920


International size reference :C, ER26500

TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)




| | |
|---------------------------------------|------------------|
| Nominal capacity @ 4 mA TO 2V | 8.5Ah |
| Rated voltage | 3.6V |
| Maximum continuous current | 230mA |
| Maximum pulse current capability | 400mA |
| Rated 1 sec. pulse capability (to 3V) | 60mA |
| Weight | 50.5g (1.78 oz.) |
| Operating temperature range | -55°C to +85°C |

U.L. Component recognition MH 12193

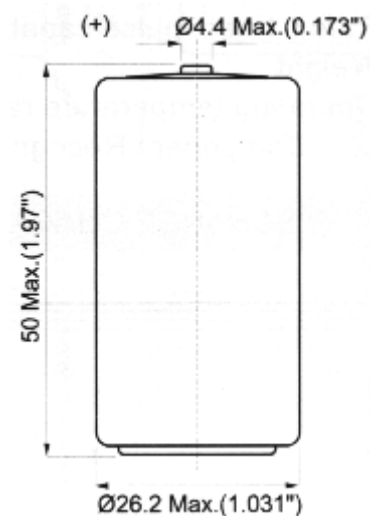

AVAILABLE TERMINATION

| | |
|------------|-------------|
| SUFFIX- /S | STANDARD |
| SUFFIX- /T | SOLDER TABS |

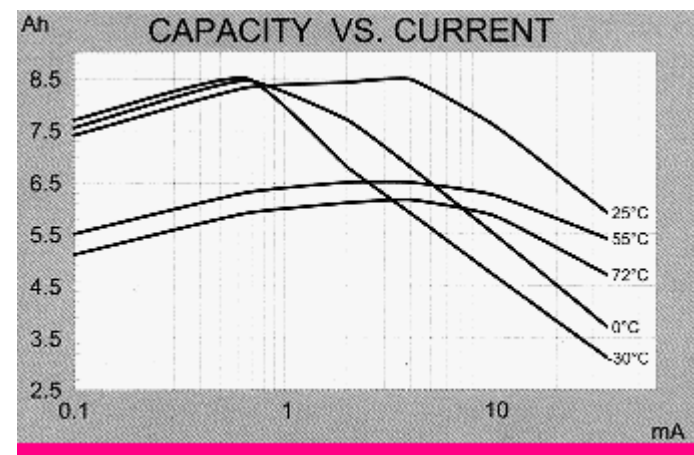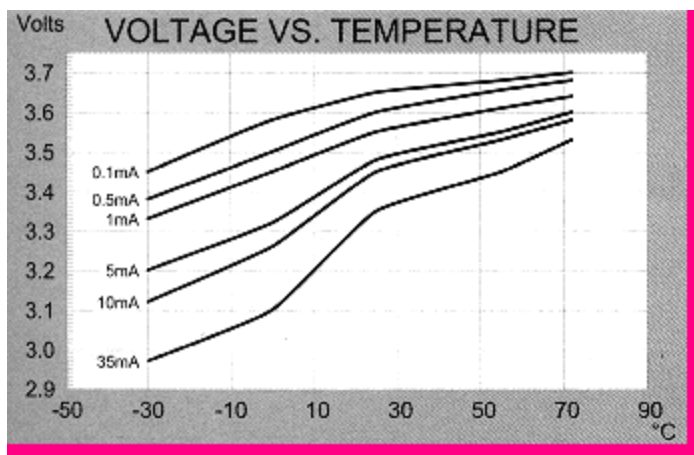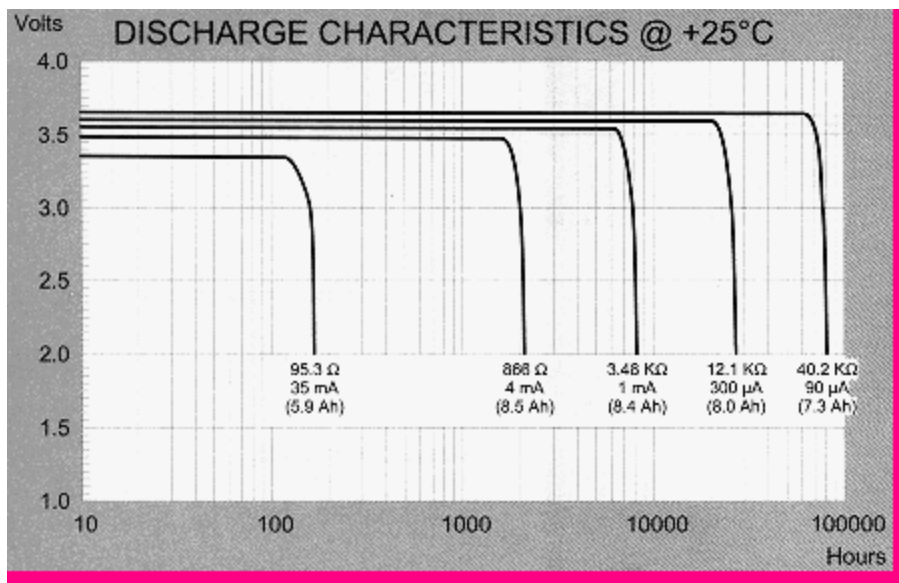

LITHIUM XTRA

Note: Any representations in this website concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

